| | |
|---|---|
| **Product Category** | 45-3-16-SS316L |
| **Part Description** | Direct Socketweld/Braze Pipe X Male Straight Thread Adapter |




## DIMENSIONS

| | |
|---|---|
| **A** | 0.855 |
| **B-THREAD** | 1.313"-12UN |
| **C** | 1.81 |
| **D** | 0.500 |
| **E** | 0.63 |

## GENERAL

| | |
|---|---|
| **Pressure Rating** | 6000 PSI |
| **O-Ring Material** | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| **Fitting Material** | 316/L Stainless Steel, ASTM A276, UNS S31600/03 |

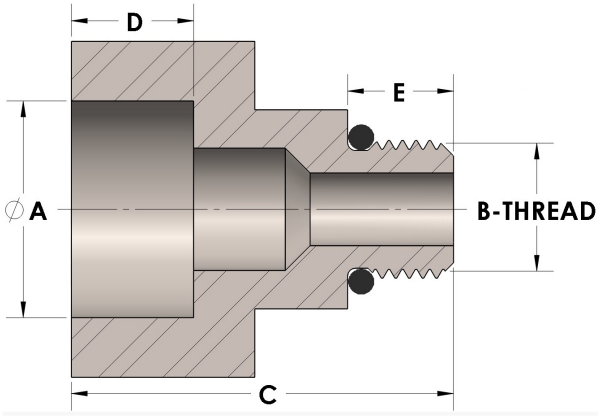

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.