




Product Category

Part Description

H816-06-06-06-M

Tube to Male Straight Thread Run Tee Assembly

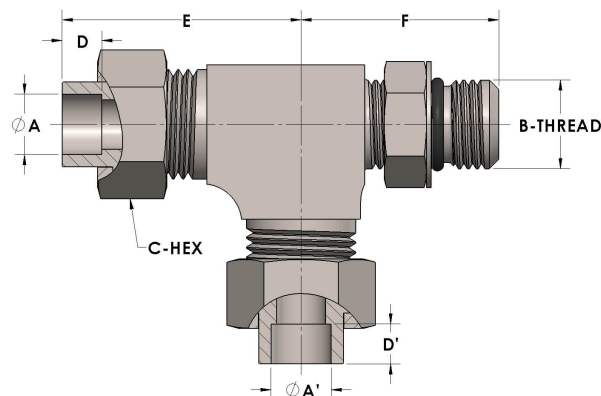

DIMENSIONS

| | |
|----------|---------------|
| A | 0.380 |
| A" | 0.380 |
| B-THREAD | .563" - 18UNF |
| C-HEX | 0.81 |
| D | 0.250 |
| D" | 0.250 |
| E | 1.50 |
| F | 1.25 |

GENERAL

| | |
|----------------------|--|
| Pressure Rating | 6000 PSI |
| Tailpiece Material | Monel®, ASTM B164, UNS N04405 |
| Threadpiece Material | Monel®, ASTM B564, UNS N04400 |
| O-Ring Material | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket |
| Connection 1 Size | 3/8" Tube O.D. (-06) |
| Connection 2 Type | Female Tube Socket |
| Connection 2 Size | 3/8" Tube O.D. (-06) |

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.