




Product Category

Part Description

H815-24-24-24-SS316L

Tube to Male Straight Thread Branch Tee Assembly

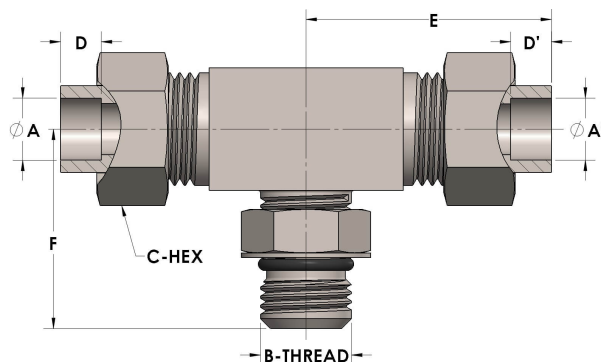

DIMENSIONS

|          |               |
|----------|---------------|
| A        | 1.500         |
| A"       | 1.500         |
| B-THREAD | 1.875" - 12UN |
| C-HEX    | 2.38          |
| D        | 0.630         |
| D"       | 0.630         |
| E        | 3.31          |
| F        | 2.44          |

GENERAL

|                   |                                                    |
|-------------------|----------------------------------------------------|
| Pressure Rating   | 3000 PSI                                           |
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material   | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket                                 |
| Connection 1 Size | 1.50" Tube O.D. (-24)                              |
| Connection 2 Type | Female Tube Socket                                 |
| Connection 2 Size | 1.50" Tube O.D. (-24)                              |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.