




Product Category

Part Description

H812-16-16-16-SS316L

Tube to Male Pipe Thread Run Tee Assembly

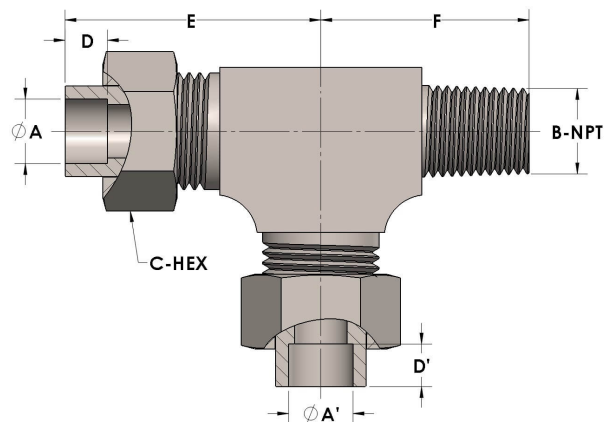

DIMENSIONS

|       |               |
|-------|---------------|
| A     | 1.000         |
| A"    | 1.000         |
| B-NPT | 1.000" - 11.5 |
| C-HEX | 1.63          |
| D     | 0.500         |
| D"    | 0.500         |
| E     | 2.75          |
| F     | 1.94          |

GENERAL

|                   |                                                    |
|-------------------|----------------------------------------------------|
| Pressure Rating   | 4500 PSI                                           |
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material   | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket                                 |
| Connection 1 Size | 1" Tube O.D. (-16)                                 |
| Connection 3 Type | Female Tube Socket                                 |
| Connection 3 Size | 1" Tube O.D. (-16)                                 |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.