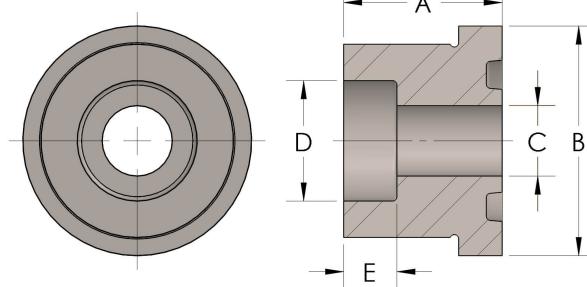


**Product Category**  
**Part Description**48R-0-M  
Socketweld Tube**DIMENSIONS**

<b>A</b>	0.690
<b>B</b>	0.91
<b>C</b>	0.19
<b>D</b>	0.250
<b>E</b>	0.38

**GENERAL**

<b>Pressure Rating</b>	6000 PSI
<b>Tailpiece Material</b>	Monel®, ASTM B164, UNS N04405
<b>O-Ring Material</b>	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.