




**Product Category**

**Part Description**

62R-2-SS316L

Male Pipe Weld

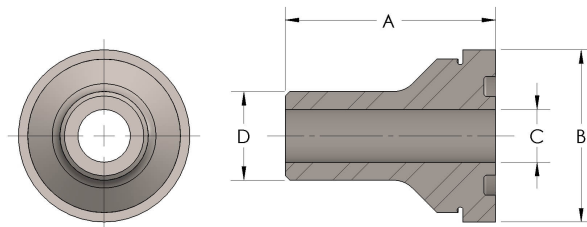

**DIMENSIONS**

|          |       |
|----------|-------|
| <b>A</b> | 1.750 |
| <b>B</b> | 1.25  |
| <b>C</b> | 0.44  |
| <b>D</b> | 0.675 |

**GENERAL**

|                           |                                                    |
|---------------------------|----------------------------------------------------|
| <b>Pressure Rating</b>    | 6000 PSI                                           |
| <b>Tailpiece Material</b> | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| <b>O-Ring Material</b>    | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.