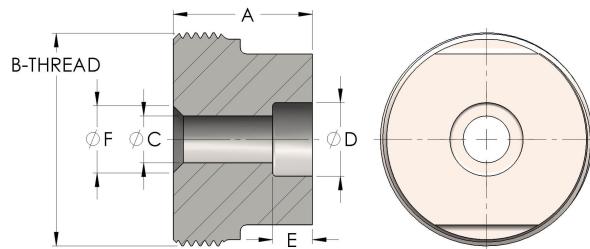


**Product Category**  
**Part Description**51T-8-7-CUNI  
Socketweld Pipe Reducer**DIMENSIONS**

|                 |               |
|-----------------|---------------|
| <b>A</b>        | 2.130         |
| <b>B-THREAD</b> | 3.750" - 12UN |
| <b>C</b>        | 1.38          |
| <b>CRN</b>      | 0A16860.2     |
| <b>D</b>        | 1.915         |
| <b>E</b>        | 0.50          |
| <b>F</b>        | 1.75          |

**GENERAL**

|                             |   |
|-----------------------------|---|
| <b>Pressure Rating</b>      | 4500 PSI                                      |
| <b>Threadpiece Material</b> | Copper Nickel 70/30, MIL-C-15726F, UNS C71500 |
| <b>CRN</b>                  | 0A16860.2                                     |

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.