




**Product Category**

**Part Description**

53R-2-SS316L

Female Pipe Thread

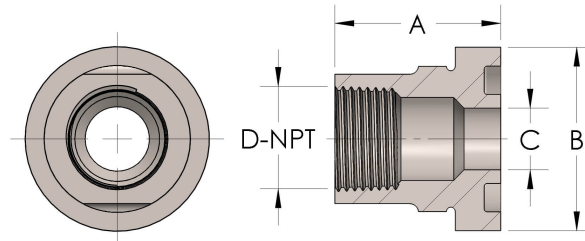

**DIMENSIONS**

|          |           |
|----------|-----------|
| A        | 1.130     |
| B        | 1.25      |
| C        | 0.44      |
| D-THREAD | 3/8" - 18 |

**GENERAL**

|                    |                                                    |
|--------------------|----------------------------------------------------|
| Pressure Rating    | 4500 PSI                                           |
| Tailpiece Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material    | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.