




**Product Category**  
**Part Description**

53R-3-SS316L  
Female Pipe Thread

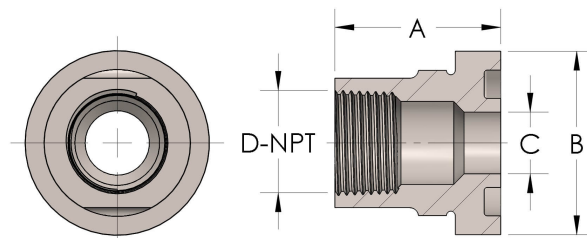

## DIMENSIONS

|          |           |
|----------|-----------|
| A        | 1.310     |
| B        | 1.63      |
| C        | 0.50      |
| D-THREAD | 1/2" - 14 |

## GENERAL

|                    |                                                    |
|--------------------|----------------------------------------------------|
| Pressure Rating    | 6000 PSI                                           |
| Tailpiece Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material    | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.