




Product Category

Part Description

H822-10-12-SS316L

Tube to Female Pipe Thread Elbow Assembly

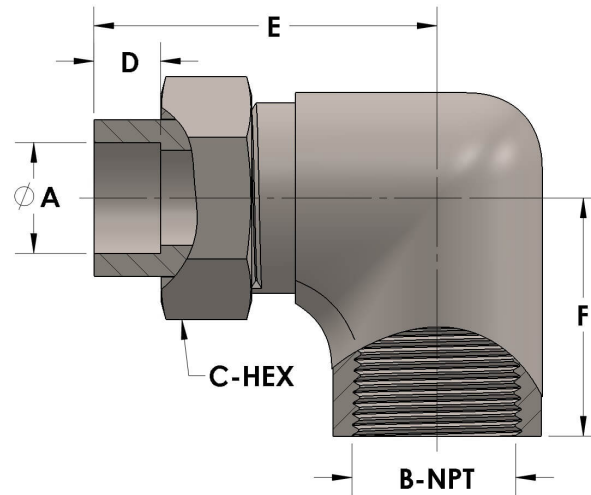

DIMENSIONS

|       |           |
|-------|-----------|
| A     | 0.630     |
| B-NPT | 3/4" - 14 |
| C-HEX | 1.13      |
| D     | 0.380     |
| E     | 2.19      |
| F     | 1.56      |

GENERAL

|                   |                                                    |
|-------------------|----------------------------------------------------|
| Pressure Rating   | 4500 PSI                                           |
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material   | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket                                 |
| Connection 1 Size | 5/8" Tube O.D. (-10)                               |
| Connection 2 Type | Female Pipe Thread                                 |
| Connection 2 Size | 3/4" NPT (-12)                                     |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.