



**Product Category**


110D-C-SS-R

**Product Line**

Steel Flanged Check Valves (110D, 111D, 113D, 114D, 115D)

**Part Description**

CLASS 150 Flange Style Silent Check Valve with Steel Body and Stainless Steel Trim

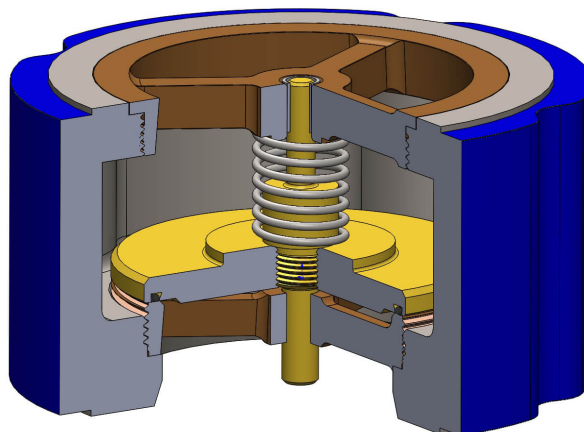

## DIMENSIONS

|                     |      |
|---------------------|------|
| Face to Face        | 3.13 |
| Dia. of Bolt Circle | 6.00 |
| Dia. of Flange      | 7.50 |
| No. of Studs        | 4    |
| Dia. of Studs       | 0.63 |
| Length of Studs     | 7.50 |
| Weight (lbs.)       | 15   |

## GENERAL

|                     |                                          |
|---------------------|------------------------------------------|
| Pressure Rating     | up to 290 PSI                            |
| Temperature Range   | -30°F to 250°F (-34°C to 121°C)          |
| Standard Soft Goods | Buna-N O-Rings                           |
| Cartridge Type      | Check                                    |
| Connection Type     | ANSI B16.5 Flange                        |
| Connection Size     | 3"                                       |
| Body Material       | Carbon Steel, ASTM A216, WCB, UNS J03002 |

OPTIONS

|                     |                                        |
|---------------------|----------------------------------------|
| Port & Vent Options | [-DP] Drain Plug Above Seat (1/2" NPT) |
| Optional Soft Goods | Viton® O-Rings, EPDM O-Rings           |

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.