



Product

20D-D-B-R


Category

Product Line

Cast Iron & Bronze Flanged Check Valves (10D, 11D, 12D, 13D, 20D, 21D)

Part Description

CLASS 125 Flange Style Silent Check Valve with Bulbous Cast Iron Body and Bronze Trim

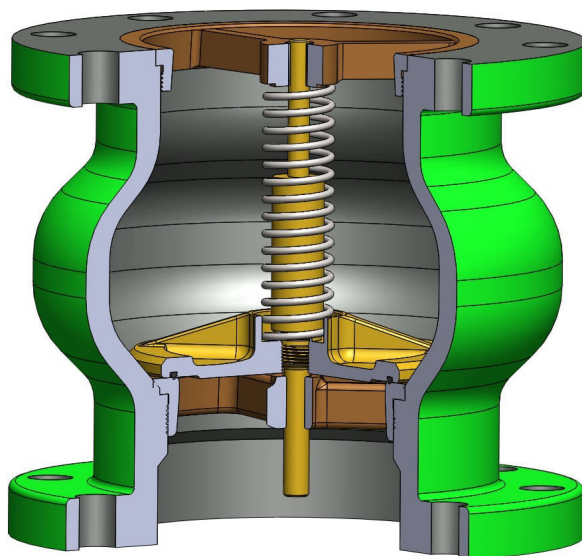

## DIMENSIONS

|                     |      |
|---------------------|------|
| Face to Face        | 7    |
| Dia. of Bolt Circle | 7.50 |
| Dia. of Flange      | 9.00 |
| No. of Studs        | 16   |
| Dia. of Studs       | 0.63 |
| Length of Studs     | 3.50 |
| Thickness of Flange | 0.94 |
| Weight (lbs.)       | 43   |

## GENERAL

|                     |                                 |
|---------------------|---------------------------------|
| Pressure Rating     | up to 200 PSI                   |
| Temperature Range   | -30°F to 250°F (-34°C to 121°C) |
| Standard Soft Goods | Buna-N O-Rings                  |

|                        |                             |
|------------------------|-----------------------------|
| <b>Cartridge Type</b>  | Check                       |
| <b>Connection Type</b> | ANSI B16.5 Flange           |
| <b>Connection Size</b> | 4"                          |
| <b>Body Material</b>   | Cast Iron, ASTM A126, CL. B |

## OPTIONS

|                            |                              |
|----------------------------|------------------------------|
| <b>Optional Soft Goods</b> | Viton® O-Rings, EPDM O-Rings |
|----------------------------|------------------------------|

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.