



Product Category


Product Line

Part Description

G2SGPF-12

G-Series® Shutoff Valve (G-S Series)

Globe Shutoff Valve with Female Pipe Thread (NPT) Ends

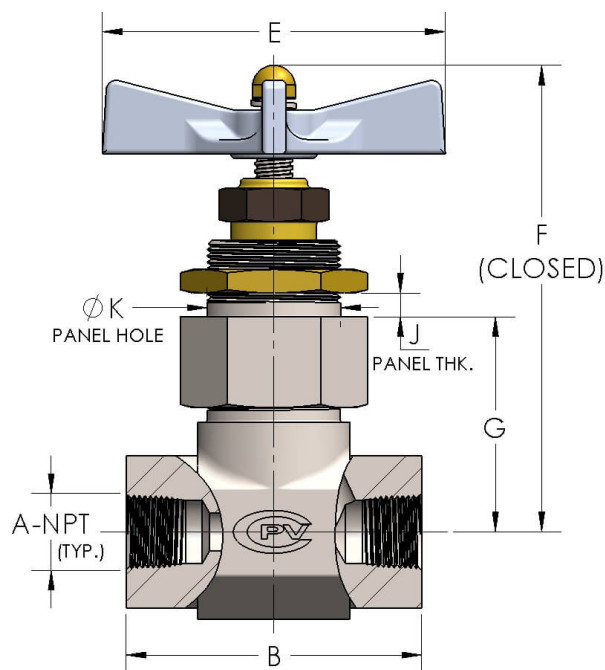

## DIMENSIONS

|          |         |
|----------|---------|
| Orifice  | 0.438   |
| A-NPT :  | 3/4"-14 |
| B        | 3.38    |
| E        | 3.50    |
| F        | 5.06    |
| G        | 2.59    |
| J (max.) | 0.44    |
| K        | 1.53    |

## GENERAL

|                   |                                 |
|-------------------|---------------------------------|
| Pressure Rating   | 6000 PSI                        |
| Temperature Range | -15°F to 400°F (-26°C to 204°C) |

|                            |                                               |
|----------------------------|-----------------------------------------------|
| <b>Standard Soft Goods</b> | [-G] Polyurethane® Packing and Viton® O-Rings |
| <b>Cartridge Type</b>      | Shutoff                                       |
| <b>Connection Type</b>     | Female Pipe Thread (NPT)                      |
| <b>Connection Size</b>     | 3/4"                                          |
| <b>Body Material</b>       | 316/L Stainless Steel, ASTM A182, UNS S31603  |
| <b>Bonnet Material</b>     | 316/L Stainless Steel, ASTM A276, UNS S31603  |

## OPTIONS

|                             |                                                                                                           |
|-----------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>[-VC] Vacuum Service</b> | Option to add additional softgoods for internal vacuum service.                                           |
| <b>Optional Soft Goods</b>  | [-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings |