



**Product Category**


**Product Line**

**Part Description**

1380-1-P-OXNB-VC-NO

FloMaster® Actuated OXNB Shutoff Valve (1300 Series)

1/4" Globe Shutoff Oxygen Actuated Valve, Normally Open

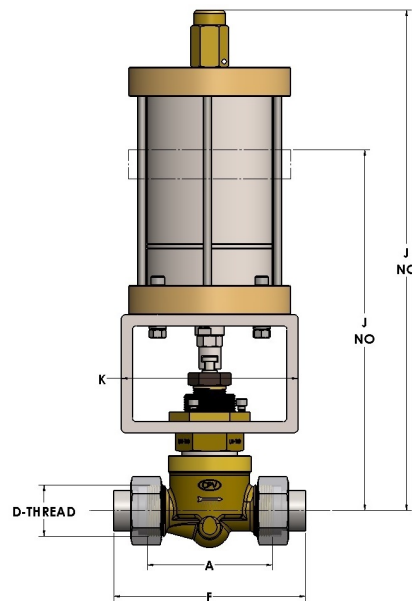

## DIMENSIONS

|                   |             |
|-------------------|-------------|
| Port Dia.         | 0.31        |
| A                 | 3.380       |
| CRN               | 0C16868.2   |
| D-THREAD          | 1.188"-12UN |
| F                 | 5.50        |
| J (Normally Open) | 10          |
| K                 | 4           |

## GENERAL

|                     |                                 |
|---------------------|---------------------------------|
| Pressure Rating     | 4500 PSI                        |
| Temperature Range   | -15°F to 400°F (-26°C to 204°C) |
| Standard Soft Goods | [-C] Viton® Packing & O-Rings   |
| Cartridge Type      | Shutoff                         |

|                        |                                   |
|------------------------|-----------------------------------|
| <b>Connection Type</b> | O-SEAL® Union Thread              |
| <b>Connection Size</b> | 1/4"                              |
| <b>Body Material</b>   | Naval Brass, ASTM B21, UNS C46400 |
| <b>Bonnet Material</b> | Naval Brass, ASTM B21, UNS C46400 |
| <b>CRN</b>             | 0C16868.2                         |

## OPTIONS

|                                |                                                                                                                                                |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Port &amp; Vent Options</b> | [-PA] Port Above Seat (1/8" NPT), [-PB] Port Below Seat (1/8" NPT), '[-VA] Vent Above Seat (3/8"-24 SAE), [-VB] Vent Below Seat (3/8"-24 SAE), |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|