



Product Category


Product Line

Part Description

123A-8

O-SEAL® In-Line Check Valves (123A Series)

2.00" In-Line Check Valve with O-SEAL® Ends

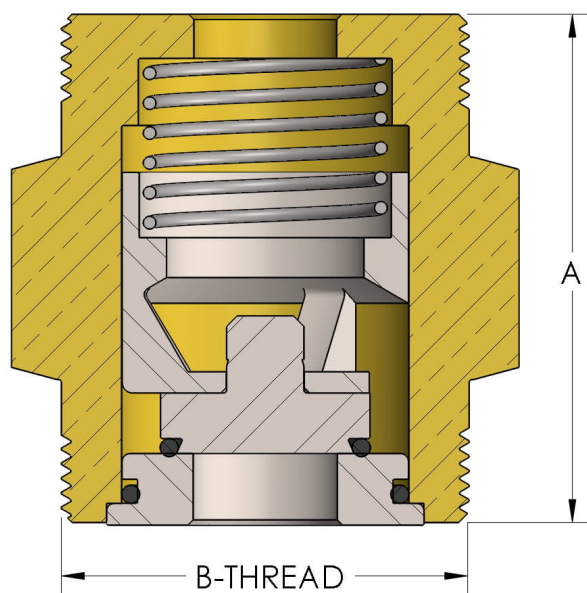

## DIMENSIONS

|           |             |
|-----------|-------------|
| Port Dia. | 1.69        |
| A         | 4.000       |
| B-THREAD  | 3.750"-12UN |
| CRN       | 0C17716.2   |

## GENERAL

|                     |                                 |
|---------------------|---------------------------------|
| Pressure Rating     | 6000 PSI                        |
| Temperature Range   | -15°F to 400°F (-26°C to 204°C) |
| Standard Soft Goods | [-C] Viton® O-Rings             |
| Cartridge Type      | Check                           |
| Connection Type     | O-SEAL® Union Thread            |
| Connection Size     | 2.00"                           |
| CRN                 | 0C17716.2                       |

OPTIONS

|                     |                                                                                                           |
|---------------------|-----------------------------------------------------------------------------------------------------------|
| Optional Soft Goods | [-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings |
|---------------------|-----------------------------------------------------------------------------------------------------------|

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.