



**Product**

14D-C-SS-R


**Category**

**Product Line**

Air Check Valves (14D, 15D, 16D, 17D, 125D, 126D)

**Part Description**

CLASS 125 Flange Style Silent Air Check Valve with Cast Iron Body and Stainless Steel Trim

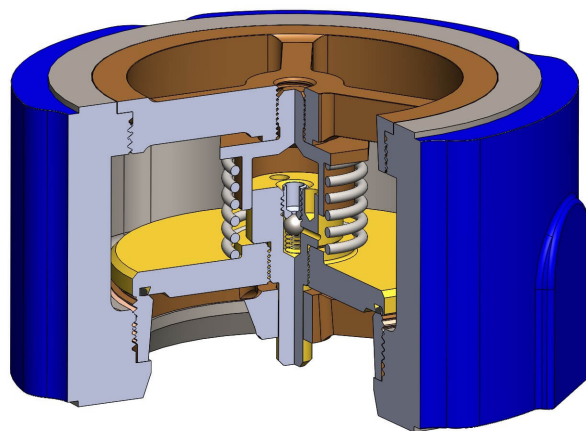

## DIMENSIONS

|                     |      |
|---------------------|------|
| Face to Face        | 3.13 |
| Dia. of Bolt Circle | 6.00 |
| Dia. of Flange      | 7.50 |
| No. of Studs        | 4    |
| Dia. of Studs       | 0.63 |
| Length of Studs     | 7.50 |
| Weight (lbs.)       | 15   |

## GENERAL

|                     |                                 |
|---------------------|---------------------------------|
| Pressure Rating     | up to 200 PSI                   |
| Temperature Range   | -30°F to 250°F (-34°C to 121°C) |
| Standard Soft Goods | Buna-N O-Rings                  |
| Cartridge Type      | Air Check                       |
| Connection Type     | ANSI B16.5 Flange               |
| Connection Size     | 3"                              |

|               |                             |
|---------------|-----------------------------|
| Body Material | Cast Iron, ASTM A126, CL. B |
|---------------|-----------------------------|

## OPTIONS

|                     |                                        |
|---------------------|----------------------------------------|
| Port & Vent Options | [-DP] Drain Plug Above Seat (1/2" NPT) |
| Optional Soft Goods | Viton® O-Rings, EPDM O-Rings           |

[cpvmfg.com](http://cpvmfg.com) | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.