



Product

125D-D-SS-R


Category

Product Line

Air Check Valves (14D, 15D, 16D, 17D, 125D, 126D)

Part Description

CLASS 150 Flange Style Silent Air Check Valve with Steel Body and Stainless Steel Trim

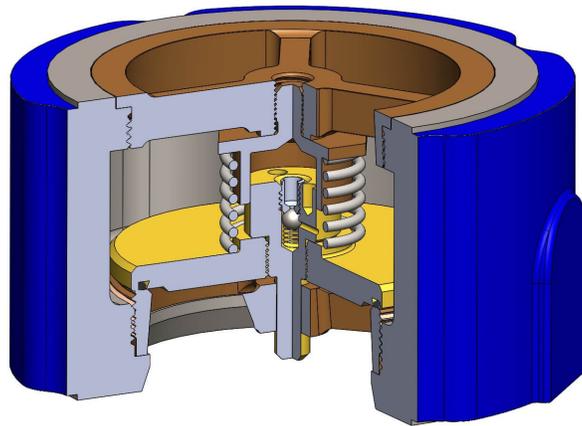

DIMENSIONS

| | |
|---------------------|------|
| Face to Face | 4 |
| Dia. of Bolt Circle | 7.50 |
| Dia. of Flange | 9.00 |
| No. of Studs | 8 |
| Dia. of Studs | 0.63 |
| Length of Studs | 8.50 |
| Weight (lbs.) | 27 |

GENERAL

| | |
|---------------------|---------------------------------|
| Pressure Rating | up to 290 PSI |
| Temperature Range | -30°F to 250°F (-34°C to 121°C) |
| Standard Soft Goods | Buna-N O-Rings |
| Cartridge Type | Air Check |
| Connection Type | ANSI B16.5 Flange |
| Connection Size | 4" |

Body Material

Carbon Steel, ASTM A216, WCB, UNS J03002

OPTIONS

Port & Vent Options

[-DP] Drain Plug Above Seat (1/2" NPT)

Optional Soft Goods

Viton® O-Rings, EPDM O-Rings

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.