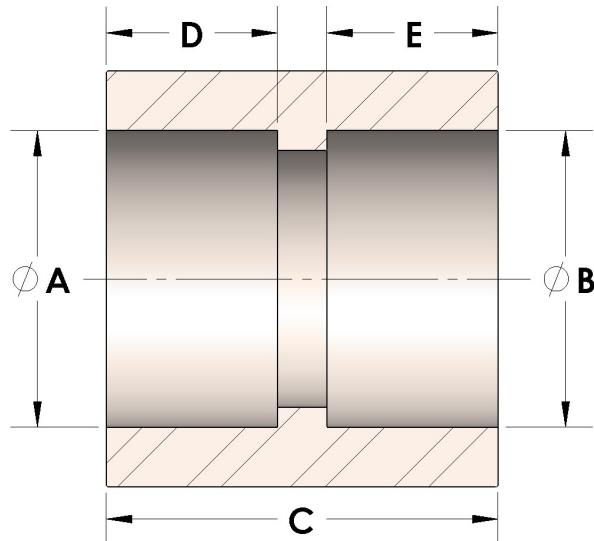


Product Category
Part Description100-2-CUNI
Direct Socketweld/Braze Coupling (Pipe)**DIMENSIONS**

| | |
|---|-------|
| A | 0.690 |
| B | 0.69 |
| C | 1.06 |
| D | 0.380 |
| E | 0.38 |

GENERAL

| | |
|------------------|---|
| Pressure Rating | 4500 PSI |
| Fitting Material | Copper Nickel 70/30, MIL-C-15726F, UNS C71500 |

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.