



**Product**

11D-B-SS-R


**Category**

**Product Line**

Cast Iron & Bronze Flanged Check Valves (10D, 11D, 12D, 13D, 20D, 21D)

**Part Description**

CLASS 250 Flange Style Silent Check Valve with Cast Iron Body and Stainless Steel Trim

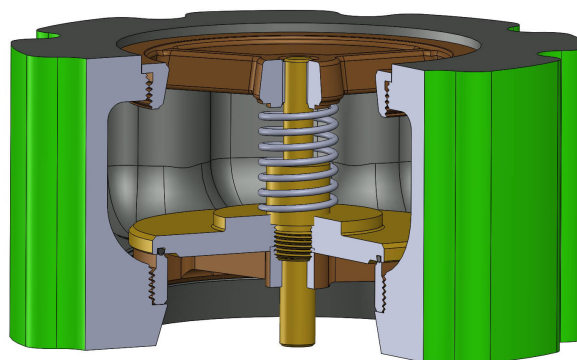

## DIMENSIONS

|                     |      |
|---------------------|------|
| Face to Face        | 2.88 |
| Dia. of Bolt Circle | 5.88 |
| Dia. of Flange      | 7.50 |
| No. of Studs        | 8    |
| Dia. of Studs       | 0.75 |
| Length of Studs     | 7.00 |
| Weight (lbs.)       | 12   |

## GENERAL

|                     |                                 |
|---------------------|---------------------------------|
| Pressure Rating     | up to 500 PSI                   |
| Temperature Range   | -30°F to 250°F (-34°C to 121°C) |
| Standard Soft Goods | Buna-N O-Rings                  |
| Cartridge Type      | Check                           |
| Connection Type     | ANSI B16.5 Flange               |
| Connection Size     | 2.5"                            |
| Body Material       | Cast Iron, ASTM A126, CL. B     |

OPTIONS

|                     |                                        |
|---------------------|----------------------------------------|
| Port & Vent Options | [-DP] Drain Plug Above Seat (3/8" NPT) |
| Optional Soft Goods | Viton® O-Rings, EPDM O-Rings           |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.