



Product

11D-G-SS-R


Category

Product Line

Cast Iron & Bronze Flanged Check Valves (10D, 11D, 12D, 13D, 20D, 21D)

Part Description

CLASS 250 Flange Style Silent Check Valve with Cast Iron Body and Stainless Steel Trim

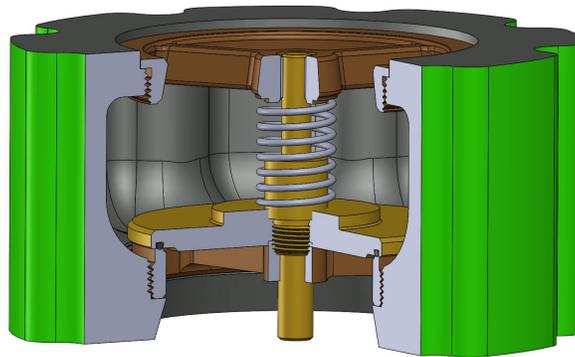

## DIMENSIONS

Face to Face	8
Dia. of Bolt Circle	13.00
Dia. of Flange	15.00
No. of Studs	12
Dia. of Studs	0.88
Length of Studs	14.00
Weight (lbs.)	125

## GENERAL

Pressure Rating	up to 500 PSI
Temperature Range	-30°F to 250°F (-34°C to 121°C)
Standard Soft Goods	Buna-N O-Rings
Cartridge Type	Check
Connection Type	ANSI B16.5 Flange
Connection Size	8"
Body Material	Cast Iron, ASTM A126, CL. B

## OPTIONS

<b>Port &amp; Vent Options</b>	[-DP] Drain Plug Above Seat (3/4" NPT)
<b>Optional Soft Goods</b>	Viton® O-Rings, EPDM O-Rings

[cpvmfg.com](http://cpvmfg.com) | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.