



Product Category


Product Line

Part Description

123A-6

O-SEAL® In-Line Check Valves (123A Series)

1.25" In-Line Check Valve with O-SEAL® Ends

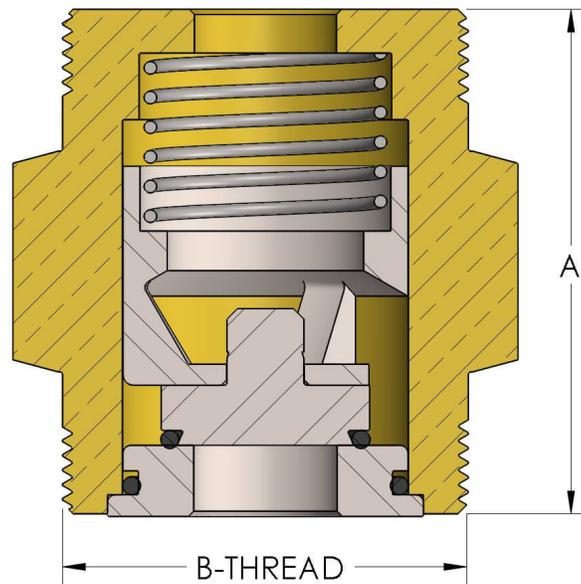

DIMENSIONS

| | |
|-----------|-------------|
| Port Dia. | 1.13 |
| A | 3.130 |
| B-THREAD | 2.750"-12UN |
| CRN | 0C17716.2 |

GENERAL

| | |
|---------------------|---------------------------------|
| Pressure Rating | 6000 PSI |
| Temperature Range | -15°F to 400°F (-26°C to 204°C) |
| Standard Soft Goods | [-C] Viton® O-Rings |
| Cartridge Type | Check |
| Connection Type | O-SEAL® Union Thread |
| Connection Size | 1.25" |
| CRN | 0C17716.2 |

OPTIONS

Optional Soft Goods

[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.