



**Product Category**


125D-A-B-R

**Product Line**

Air Check Valves (14D, 15D, 16D, 17D, 125D, 126D)

**Part Description**

CLASS 150 Flange Style Silent Air Check Valve with Steel Body and Bronze Trim

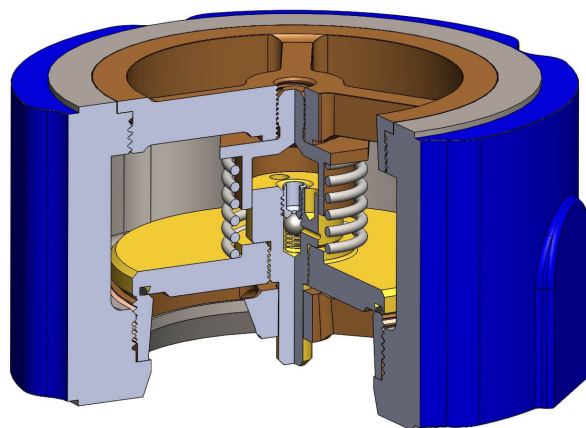

## DIMENSIONS

|                     |      |
|---------------------|------|
| Face to Face        | 2.63 |
| Dia. of Bolt Circle | 4.75 |
| Dia. of Flange      | 6.00 |
| No. of Studs        | 4    |
| Dia. of Studs       | 0.63 |
| Length of Studs     | 7.00 |
| Weight (lbs.)       | 8    |

## GENERAL

|                     |                                          |
|---------------------|------------------------------------------|
| Pressure Rating     | up to 290 PSI                            |
| Temperature Range   | -30°F to 250°F (-34°C to 121°C)          |
| Standard Soft Goods | Buna-N O-Rings                           |
| Cartridge Type      | Air Check                                |
| Connection Type     | ANSI B16.5 Flange                        |
| Connection Size     | 2"                                       |
| Body Material       | Carbon Steel, ASTM A216, WCB, UNS J03002 |

## OPTIONS

**Port & Vent Options**

[-DP] Drain Plug Above Seat (3/8" NPT)

**Optional Soft Goods**

Viton® O-Rings, EPDM O-Rings

[cpvmfg.com](http://cpvmfg.com) | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.