| | |
|---|---|
| **Product Category** | 126D-A-B-R |
| **Product Line** | Air Check Valves (14D, 15D, 16D, 17D, 125D, 126D) |
| **Part Description** | CLASS 300 Flange Style Silent Air Check Valve with Steel Body and Bronze Trim |

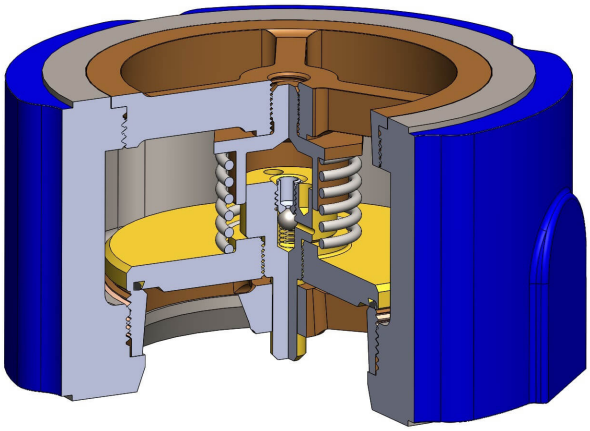

## DIMENSIONS

| | |
|---|---|
| **Face to Face** | 2.63 |
| **Dia. of Bolt Circle** | 5.00 |
| **Dia. of Flange** | 6.50 |
| **No. of Studs** | 8 |
| **Dia. of Studs** | 0.63 |
| **Length of Studs** | 7.00 |
| **Weight (lbs.)** | 8 |

## GENERAL

| | |
|---|---|
| **Pressure Rating** | up to 750 PSI |
| **Temperature Range** | -30°F to 250°F (-34°C to 121°C) |
| **Standard Soft Goods** | Buna-N O-Rings |
| **Cartridge Type** | Air Check |
| **Connection Type** | ANSI B16.5 Flange |
| **Connection Size** | 2" |
| **Body Material** | Carbon Steel, ASTM A216, WCB, UNS J03002 |

## OPTIONS

| | |
|---|---|
| **Port & Vent Options** | [-DP] Drain Plug Above Seat (3/8" NPT) |
| **Optional Soft Goods** | Viton® O-Rings, EPDM O-Rings |



The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.