



Product Category


1380-4-NO

Product Line

FloMaster® Actuated O-SEAL® Shutoff Valve (1300 Series)

Part Description

3/4" Globe Shutoff Actuated Valve, O-SEAL® Ends, Normally Open

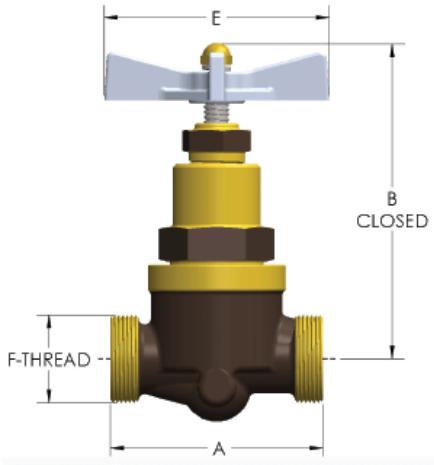

DIMENSIONS

| | |
|-------------------|-------------|
| Port Dia. | 0.63 |
| A | 4.630 |
| CRN | 0C17716.2 |
| D-THREAD | 2.000"-12UN |
| E | 8.00 |
| F (Normally Open) | 13.38 |



GENERAL

| | |
|---------------------|---|
| Pressure Rating | 6000 PSI |
| Temperature Range | -15°F to 400°F (-26°C to 204°C) |
| Standard Soft Goods | [-G] Polyurethane® Packing and Viton® O-Rings |
| Cartridge Type | Shutoff |
| Connection Type | O-SEAL® Union Thread |
| Connection Size | 3/4" |
| Body Material | Nickel Aluminum Bronze, ASTM B148, UNS C95800 |
| Bonnet Material | Nickel Aluminum Bronze, ASTM B150, UNS C63200 |
| CRN | OC17716.2 |

OPTIONS

| | |
|----------------------|---|
| [-VC] Vacuum Service | Option to add additional softgoods for internal vacuum service. |
| Port & Vent Options | [-PA] Port Above Seat (1/4" NPT), [-PB] Port Below Seat (1/4" NPT), [-VA] Vent Above Seat (1/2"-13 SAE), [-VB] Vent Below Seat (1/2"-13 SAE), |
| Optional Soft Goods | [-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings |