| | |
|---|---|
| **Product Category** | 158-0.156- |
| **Product Line** | O-SEAL® Compact Relief Valves (158 Series) |
| **Part Description** | Angle Relief Valve with -3 x -5 O-SEAL® Ends |

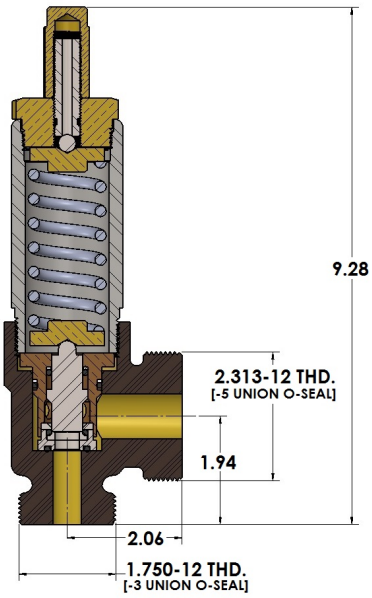


## GENERAL

| | |
|---|---|
| **Pressure Rating** | Range: 135 PSI to 6000 PSI |
| **Temperature Range** | -15°F to 400°F (-26°C to 204°C) |
| **Standard Soft Goods** | Viton® O-Rings |
| **Cartridge Type** | Relief |
| **Connection Type** | O-SEAL® Union Thread |
| **Connection Size** | -3 x -5 |
| **Body Material** | Nickel Aluminum Bronze, ASTM B148, UNS C95800 |
| **Bonnet Material** | Naval Brass, ASTM B21, UNS C46400 |

## OPTIONS

| | |
|---|---|
| **Optional Soft Goods** | Buna-N O-Rings, EPDM O-Rings |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.