



Product

17D-G-SS-R


Category

Product Line

Air Check Valves (14D, 15D, 16D, 17D, 125D, 126D)

Part Description

CLASS 300 Flange Style Silent Air Check Valve with Bronze Body and Stainless Steel Trim

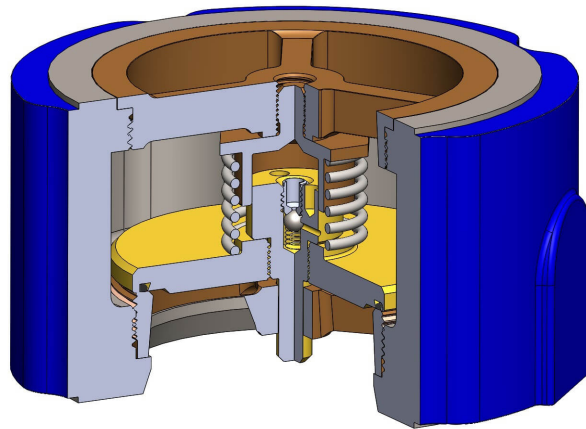

DIMENSIONS

| | |
|---------------------|-------|
| Face to Face | 8 |
| Dia. of Bolt Circle | 13.00 |
| Dia. of Flange | 15.00 |
| No. of Studs | 12 |
| Dia. of Studs | 0.88 |
| Length of Studs | 14.00 |
| Weight (lbs.) | 125 |

GENERAL

| | |
|---------------------|---------------------------------|
| Pressure Rating | up to 750 PSI |
| Temperature Range | -30°F to 250°F (-34°C to 121°C) |
| Standard Soft Goods | Buna-N O-Rings |
| Cartridge Type | Air Check |
| Connection Type | ANSI B16.5 Flange |
| Connection Size | 8" |

Body Material

Valve Bronze, ASTM B61, UNS C92200

OPTIONS

Port & Vent Options

[-DP] Drain Plug Above Seat (3/4" NPT)

Optional Soft Goods

Viton® O-Rings, EPDM O-Rings

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.