



Product

20D-C-SS-R


Category

Product Line

Cast Iron & Bronze Flanged Check Valves (10D, 11D, 12D, 13D, 20D, 21D)

Part Description

CLASS 125 Flange Style Silent Check Valve with Bulbous Cast Iron Body and Stainless Steel Trim

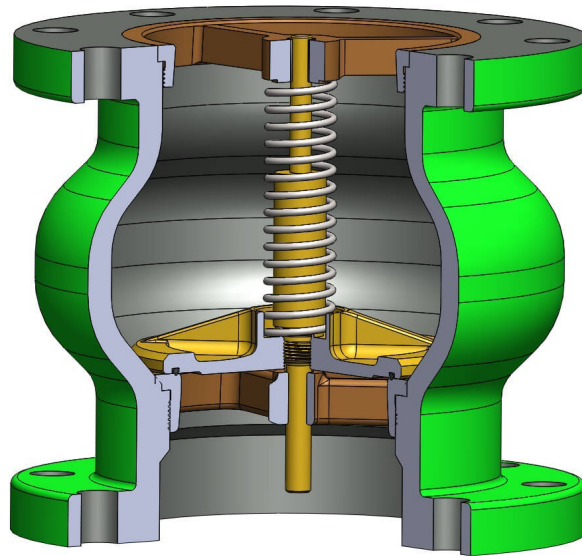

## DIMENSIONS

Face to Face	6
Dia. of Bolt Circle	6.00
Dia. of Flange	7.50
No. of Studs	8
Dia. of Studs	0.63
Length of Studs	3.25
Thickness of Flange	0.75
Weight (lbs.)	25

## GENERAL

Pressure Rating	up to 200 PSI
Temperature Range	-30°F to 250°F (-34°C to 121°C)
Standard Soft Goods	Buna-N O-Rings

<b>Cartridge Type</b>	Check
<b>Connection Type</b>	ANSI B16.5 Flange
<b>Connection Size</b>	3"
<b>Body Material</b>	Cast Iron, ASTM A126, CL. B

## OPTIONS

<b>Optional Soft Goods</b>	Viton® O-Rings, EPDM O-Rings
----------------------------	------------------------------

[cpvmfg.com](http://cpvmfg.com) | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.