



Product

21D-G-SS-R


Category

Product Line

Cast Iron & Bronze Flanged Check Valves (10D, 11D, 12D, 13D, 20D, 21D)

Part Description

CLASS 250 Flange Style Silent Check Valve with Bulbous Cast Iron Body and Stainless Steel Trim

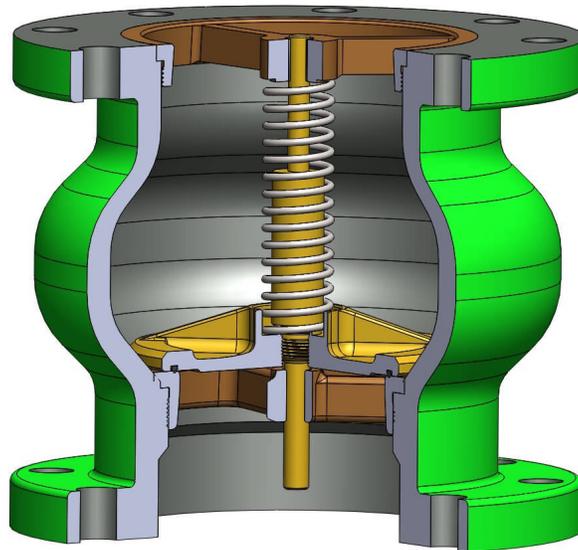

## DIMENSIONS

Face to Face	10.75
Dia. of Bolt Circle	13.00
Dia. of Flange	15.00
No. of Studs	24
Dia. of Studs	0.88
Length of Studs	5.50
Thickness of Flange	1.63
Weight (lbs.)	175

## GENERAL

Pressure Rating	up to 500 PSI
Temperature Range	-30°F to 250°F (-34°C to 121°C)
Standard Soft Goods	Buna-N O-Rings

<b>Cartridge Type</b>	Check
<b>Connection Type</b>	ANSI B16.5 Flange
<b>Connection Size</b>	8"
<b>Body Material</b>	Cast Iron, ASTM A126, CL. B

## OPTIONS

<b>Optional Soft Goods</b>	Viton® O-Rings, EPDM O-Rings
----------------------------	------------------------------

[cpvmfg.com](http://cpvmfg.com) | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.