| | |
|---|---|
| **Product Category** | 37-6 |
| **Product Line** | NPT Threaded Check Valves (34, 36, 37 Series) |
| **Part Description** | Stainless Steel Body In-line Silent Check Valve with Female Pipe Thread (NPT) Ends |

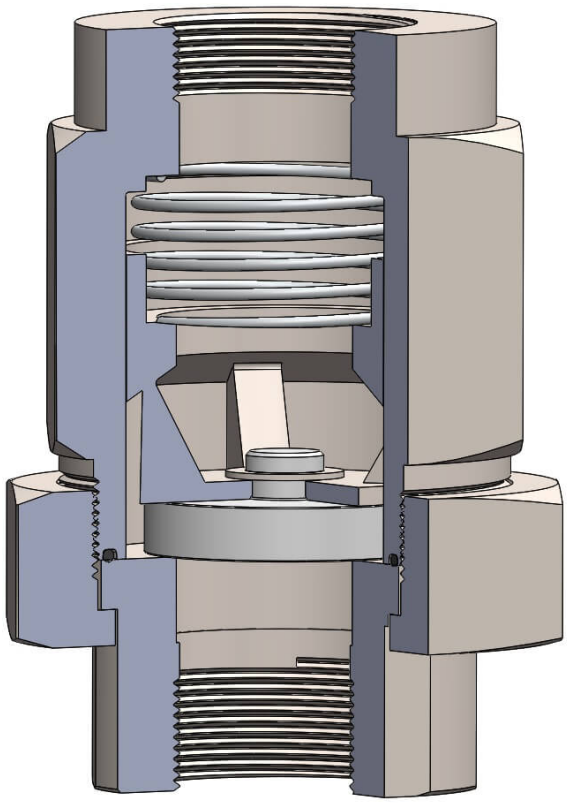

## DIMENSIONS

| | |
|---|---|
| **End to End** | 5.25 |
| **Female Inlet and Outlet (NPT)** | 1.250"-11.5 |
| **Weight (lbs.)** | 7.5 |

## GENERAL

| | |
|---|---|
| **Pressure Rating** | 300 PSI |
| **Temperature Range** | -30°F to 250°F (-34°C to 121°C) |
| **Standard Soft Goods** | Buna-N O-Rings and Nylon Disc |

| | |
|---|---|
| **Cartridge Type** | Check |
| **Connection Type** | Female Pipe Thread (NPT) |
| **Connection Size** | 1.25" |
| **Body Material** | 304/L Stainless Steel, ASTM A276, UNS S30403 |

## OPTIONS

| | |
|---|---|
| **Optional Soft Goods** | Viton® O-Rings, EPDM O-Rings |



The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.