| | |
|---|---|
| **Product Category** | 48R-0-S |
| **Part Description** | Socketweld Tube |




## DIMENSIONS

| | |
|---|---|
| **A** | 0.690 |
| **B** | 0.91 |
| **C** | 0.19 |
| **D** | 0.250 |
| **E** | 0.38 |

## GENERAL

| | |
|---|---|
| **Pressure Rating** | 6000 PSI |
| **Tailpiece Material** | Carbon Steel, ASTM A108 |
| **O-Ring Material** | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |

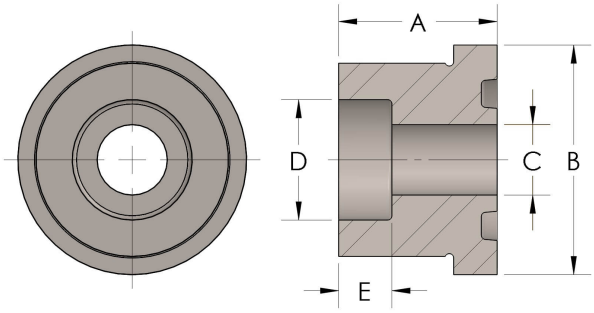

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.