




**Product Category**  
**Part Description**

48R-9-SS316L  
Socketweld Tube

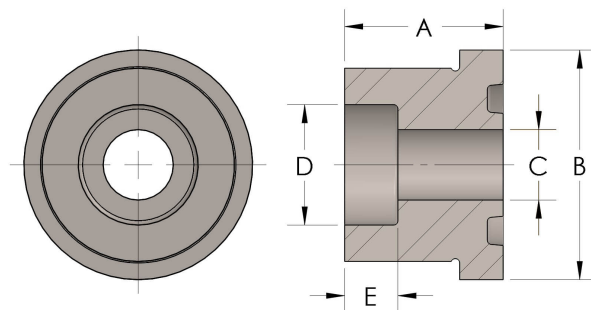

## DIMENSIONS

|   |  |
|---|--|
| A |  |
| B |  |
| C |  |
| D |  |
| E |  |

## GENERAL

|                    |                                                    |
|--------------------|----------------------------------------------------|
| Pressure Rating    | 4500 PSI                                           |
| Tailpiece Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material    | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.