




**Product Category**

**Part Description**

63T-8-SS316L

Male Tube Weld

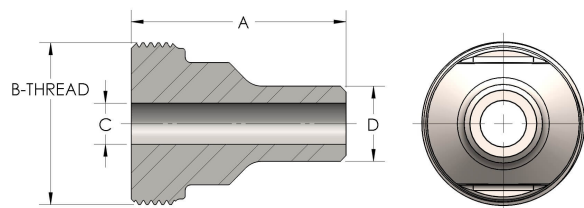

**DIMENSIONS**

|                 |               |
|-----------------|---------------|
| <b>A</b>        | 3.880         |
| <b>B-THREAD</b> | 3.750" - 12UN |
| <b>C</b>        | 1.75          |
| <b>D</b>        | 2.500         |

**GENERAL**

|                             |                                                 |
|-----------------------------|-------------------------------------------------|
| <b>Pressure Rating</b>      | 6000 PSI                                        |
| <b>Threadpiece Material</b> | 316/L Stainless Steel, ASTM A276, UNS S31600/03 |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.