




Product Category

Part Description

64R-6-5-M

Female Straight Thread

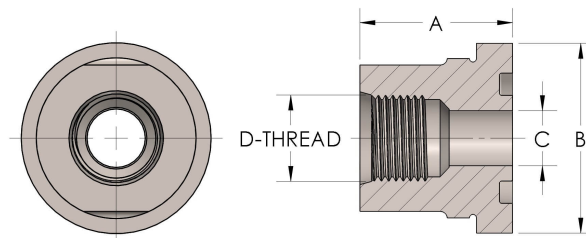

DIMENSIONS

|          |               |
|----------|---------------|
| A        | 1.690         |
| B        | 2.63          |
| C        | 1.19          |
| D-THREAD | 1.625" - 12UN |

GENERAL

|                    |                                                    |
|--------------------|----------------------------------------------------|
| Pressure Rating    | 6000 PSI                                           |
| Tailpiece Material | Monel®, ASTM B164, UNS N04405                      |
| O-Ring Material    | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.