




Product Category
Part Description

64T-3-3-SS316L
Female Straight Thread

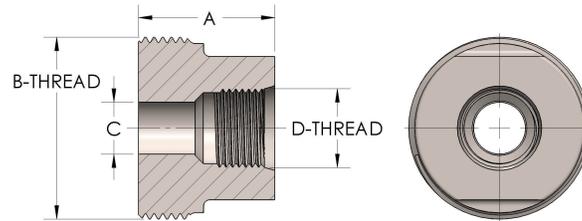

DIMENSIONS

A	1.310
B-THREAD	1.750" - 12UN
C	0.50
D-THREAD	1.063" - 12UN

GENERAL

Pressure Rating	4500 PSI
Threadpiece Material	316/L Stainless Steel, ASTM A276, UNS S31600/03

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.