



Product Category


681-4

Product Line

O-SEAL® Check Valves (600 Series)

Part Description

3/4" Angle Check Valve with O-SEAL® Ends

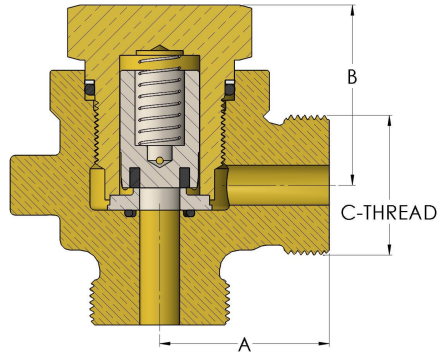

DIMENSIONS

| | |
|-----------|-------------|
| Port Dia. | 0.63 |
| A | 2.310 |
| B | 2.81 |
| C | 2.38 |
| C-THREAD | 2.000"-12UN |

GENERAL

| | |
|---------------------|---|
| Pressure Rating | 6000 PSI |
| Temperature Range | -15°F to 275°F (-26°C to 135°C) |
| Standard Soft Goods | [-C] Viton® O-Rings |
| Cartridge Type | Check |
| Connection Type | O-SEAL® Union Thread |
| Connection Size | 3/4" |
| Body Material | Nickel Aluminum Bronze, ASTM B148, UNS C95800 |
| Bonnet Material | Nickel Aluminum Bronze, ASTM B150, UNS C63200 |



OPTIONS

Port & Vent Options

[-PA] Port Above Seat (1/4" NPT), [-PB] Port Below Seat (1/4" NPT), '[-VA] Vent Above Seat (1/2"-13 SAE), [-VB] Vent Below Seat (1/2"-13 SAE),

Optional Soft Goods

[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings