


**Product Category**  
**Product Line**  
**Part Description**

8-04SAU-06  
Mark VIII® Shutoff Valve (8-S Series)  
Angle Shutoff Valve with Mark VIII® Ends

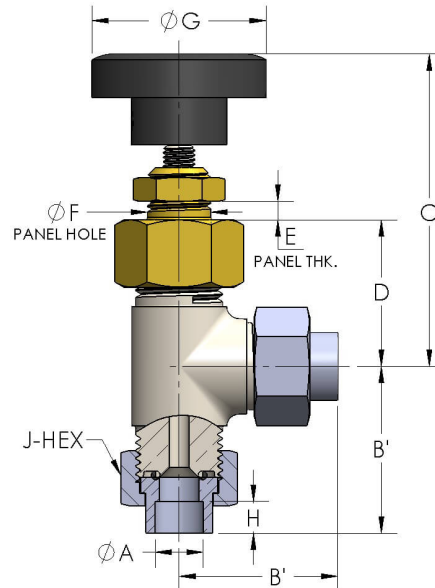

## DIMENSIONS

|            |       |
|------------|-------|
| Orifice    | 0.156 |
| A          | 0.380 |
| B'         | 1.50  |
| C (Open)   | 2.59  |
| C (Closed) | 2.44  |
| D          | 1.220 |
| E          | 0.25  |
| F          | 0.53  |
| G          | 1.38  |
| H          | 0.25  |
| J-HEX      | 0.81  |



## GENERAL

|                     |   |
|---------------------|---|
| Pressure Rating     | 3000 PSI                                      |
| Temperature Range   | -15°F to 400°F (-26°C to 204°C)               |
| Standard Soft Goods | [-C] Viton® O-Rings                           |
| Cartridge Type      | Shutoff                                       |
| Connection Type     | Mark VIII® Union Thread                       |
| Tube O.D.           | 3/8"  |
| Body Material       | 316/L Stainless Steel, ASTM A276, UNS S31603  |
| Bonnet Material     | Nickel Aluminum Bronze, ASTM B150, UNS C63200 |

## OPTIONS

|                     |  |
|---------------------|--|
| Optional Soft Goods | [-B] Buna-N O-Rings, [-D] EPDM O-Rings |
|---------------------|--|