

**Product Category**

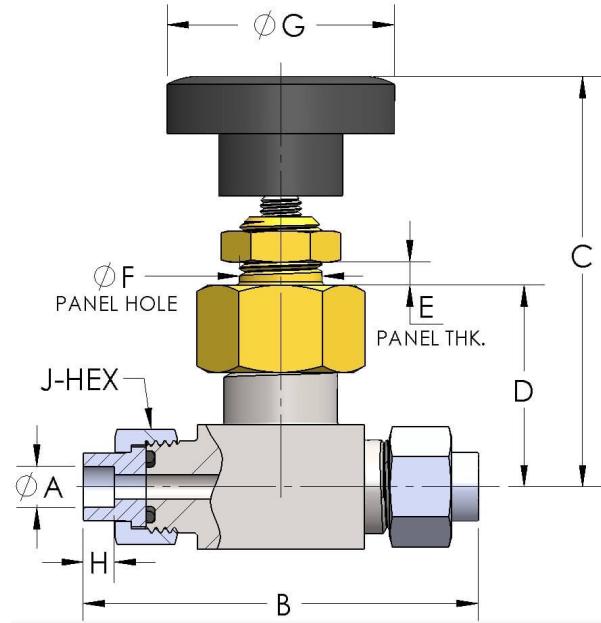
8-04SGU-02

**Product Line**

Mark VIII® Shutoff Valve (8-S Series)

**Part Description**

In-line Shutoff Valve with Mark VIII® Ends


**DIMENSIONS**

<b>Orifice</b>	0.156
<b>A</b>	0.130
<b>B</b>	2.38
<b>C (Open)</b>	2.59
<b>C (Closed)</b>	2.44
<b>D</b>	1.220
<b>E</b>	0.25
<b>F</b>	0.53
<b>G</b>	1.38
<b>H</b>	0.19
<b>J-HEX</b>	0.63

**GENERAL**

<b>Pressure Rating</b>	3000 PSI
<b>Temperature Range</b>	-15°F to 400°F (-26°C to 204°C)
<b>Standard Soft Goods</b>	[ -C ] Viton® O-Rings
<b>Cartridge Type</b>	Shutoff
<b>Connection Type</b>	Mark VIII® Union Thread
<b>Tube O.D.</b>	1/8"
<b>Body Material</b>	316/L Stainless Steel, ASTM A276, UNS S31603
<b>Bonnet Material</b>	Nickel Aluminum Bronze, ASTM B150, UNS C63200

## OPTIONS

<b>Optional Soft Goods</b>	[ -B ] Buna-N O-Rings, [ -D ] EPDM O-Rings
----------------------------	--

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.