



Product Category


980-B-2-M

Product Line

Instrument Valves (900 Series)

Part Description

Globe Instrument Valve with Flareless X Straight Thread Ends

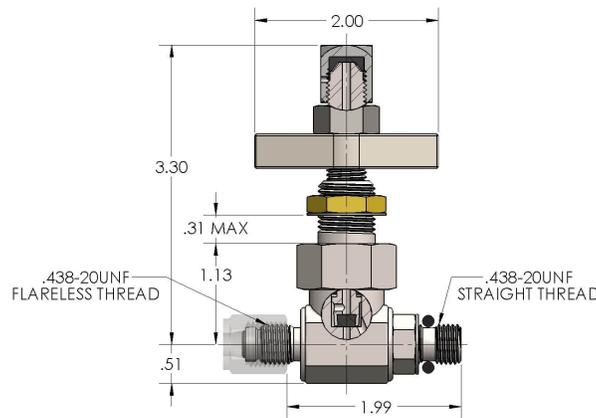

GENERAL

| | |
|---------------------|--|
| Pressure Rating | 6000 PSI |
| Temperature Range | -30°F to 250°F (-34°C to 121°C) |
| Standard Soft Goods | Buna-N O-Rings |
| Cartridge Type | Shutoff |
| Connection Type | Compression X Straight Thread |
| Connection Size | 1/4 Tube X .438"-20UNF |
| Body Material | Monel®, ASTM B564, UNS N04400 |
| Bonnet Material | 416 Stainless Steel, ASTM A582, UNS S41600 |
| Approved per | NSSC 803-6397304F |

OPTIONS

| | |
|---------------------|------------------------------|
| Optional Soft Goods | Viton® O-Rings, EPDM O-Rings |
|---------------------|------------------------------|

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.