



Product Category


Product Line

Part Description

G0CGPF-06

G-Series® Check Valves (G-C Series)

Globe Check Valve with Female Pipe Thread (NPT) Ends

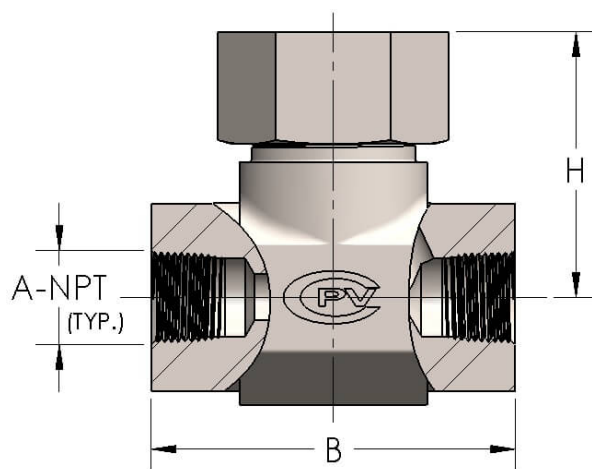

## DIMENSIONS

|         |         |
|---------|---------|
| Orifice |         |
| A-NPT : | 3/8"-18 |
| B       |         |
| H       | 1.19    |

## GENERAL

|                     |                                               |
|---------------------|-----------------------------------------------|
| Pressure Rating     | 6000 PSI                                      |
| Temperature Range   | -15°F to 400°F (-26°C to 204°C)               |
| Standard Soft Goods | [-G] Polyurethane® Packing and Viton® O-Rings |
| Cartridge Type      | Check                                         |
| Connection Type     | Female Pipe Thread (NPT)                      |
| Connection Size     | 3/8"                                          |
| Body Material       | 316/L Stainless Steel, ASTM A182, UNS S31603  |
| Bonnet Material     | 316/L Stainless Steel, ASTM A276, UNS S31603  |

## OPTIONS

|                      |                                                                                                           |
|----------------------|-----------------------------------------------------------------------------------------------------------|
| [-VC] Vacuum Service | Option to add additional softgoods for internal vacuum service.                                           |
| Optional Soft Goods  | [-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings |