

Product Category


G2SGPS-12

Product Line

G-Series® Shutoff Valve (G-S Series)

Part Description

Globe Shutoff Valve with Socketweld Pipe Ends

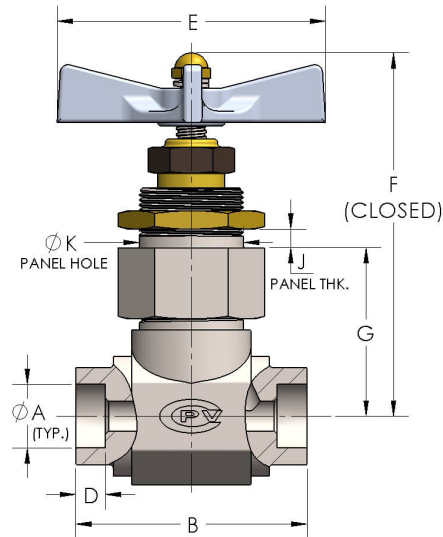

## DIMENSIONS

|          |       |
|----------|-------|
| Orifice  | 0.438 |
| A (NPS)  | 1.050 |
| B        | 3.50  |
| D        | 0.500 |
| E        | 3.50  |
| F        | 5.06  |
| G        | 2.59  |
| J (max.) | 0.44  |
| K        | 1.53  |



## GENERAL

|                     |   |
|---------------------|---|
| Pressure Rating     | 6000 PSI                                      |
| Temperature Range   | -15°F to 400°F (-26°C to 204°C)               |
| Standard Soft Goods | [-G] Polyurethane® Packing and Viton® O-Rings |
| Cartridge Type      | Shutoff                                       |
| Connection Type     | Socketweld Pipe                               |
| Connection Size     | 3/4"  |
| Body Material       | 316/L Stainless Steel, ASTM A182, UNS S31603  |
| Bonnet Material     | 316/L Stainless Steel, ASTM A276, UNS S31603  |

## OPTIONS

|                      |   |
|----------------------|---|
| [-VC] Vacuum Service | Option to add additional softgoods for internal vacuum service.   |
| Optional Soft Goods  | [-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings |