



Product Category


Product Line

Part Description

G4NGPF-16

G-Series® Needle Valve (G-N Series)

Globe Needle Valve with Female Pipe Thread (NPT) Ends

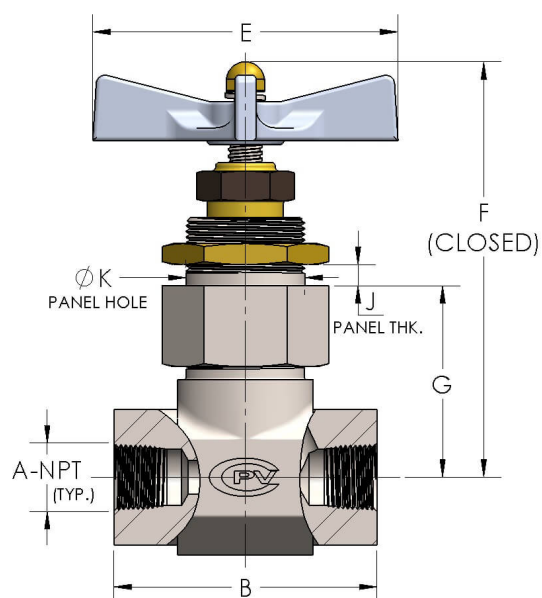

## DIMENSIONS

|          |             |
|----------|-------------|
| Orifice  | 0.625       |
| A-NPT :  | 1.000"-11.5 |
| B        | 4.38        |
| E        | 5.25        |
| F        | 6.00        |
| G        | 3           |
| J (max.) | 0.56        |
| K        | 1.78        |

## GENERAL

|                     |                                               |
|---------------------|-----------------------------------------------|
| Pressure Rating     | 6000 PSI                                      |
| Temperature Range   | -15°F to 400°F (-26°C to 204°C)               |
| Standard Soft Goods | [-G] Polyurethane® Packing and Viton® O-Rings |

|                        |                                              |
|------------------------|----------------------------------------------|
| <b>Cartridge Type</b>  | Needle                                       |
| <b>Connection Type</b> | Female Pipe Thread (NPT)                     |
| <b>Connection Size</b> | 1.00"                                        |
| <b>Body Material</b>   | 316/L Stainless Steel, ASTM A182, UNS S31603 |
| <b>Bonnet Material</b> | 316/L Stainless Steel, ASTM A276, UNS S31603 |

## OPTIONS

|                             |                                                                                                           |
|-----------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>[-VC] Vacuum Service</b> | Option to add additional softgoods for internal vacuum service.                                           |
| <b>Optional Soft Goods</b>  | [-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings |

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.