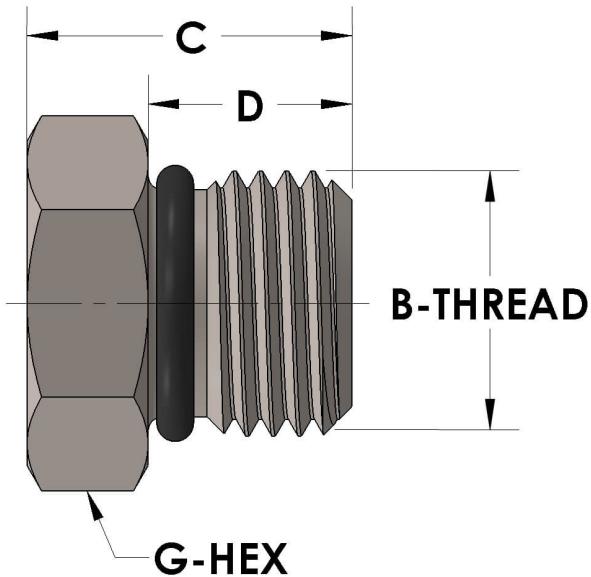


Product Category  
Part DescriptionH805-08-SS316L  
Straight Thread Plug

## DIMENSIONS

|          |               |
|----------|---------------|
| B-THREAD | .750" - 16UNF |
| C        | 0.75          |
| D        | 0.470         |
| G-HEX    | 0.88          |

## GENERAL

|                      |                                                    |
|----------------------|----------------------------------------------------|
| Pressure Rating      | 6000 PSI                                           |
| Threadpiece Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material      | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.