




**Product Category**  
**Part Description**

H809-06-SS316L  
Socketweld/braze Tube Cross Assembly

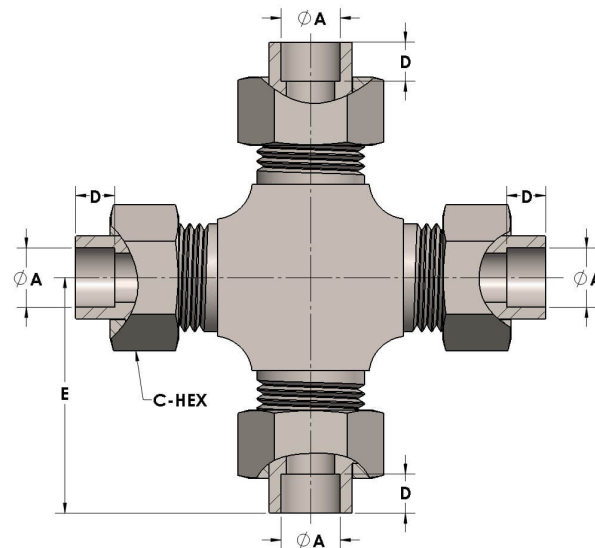

## DIMENSIONS

|       |       |
|-------|-------|
| A     | 0.380 |
| C-HEX | 0.81  |
| D     | 0.250 |
| E     | 1.50  |

## GENERAL

|                   |                                                    |
|-------------------|----------------------------------------------------|
| Pressure Rating   | 6000 PSI                                           |
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material   | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket                                 |
| Connection 1 Size | 3/8" Tube O.D. (-06)                               |
| Connection 2 Type | Female Tube Socket                                 |
| Connection 2 Size | 3/8" Tube O.D. (-06)                               |
| Connection 3 Type | Female Tube Socket                                 |
| Connection 3 Size | 3/8" Tube O.D. (-06)                               |
| Connection 4 Type | Female Tube Socket                                 |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.