




Product Category

Part Description

H810-20-20-16-SS316L

Socketweld/braze Tube Tee Assembly

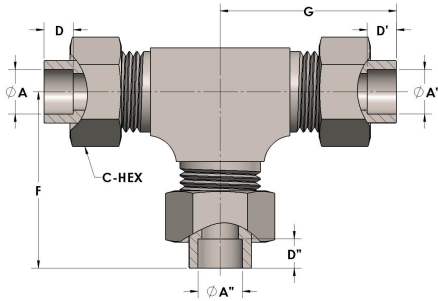

DIMENSIONS

| | |
|-------|-------|
| A | 1.250 |
| A' | 1.250 |
| A'' | 1.000 |
| C-HEX | 2 |
| D | 0.560 |
| D' | 0.560 |
| D'' | 0.500 |
| F | 3.06 |
| G | 3.06 |



GENERAL

| | |
|-------------------|--|
| Pressure Rating | 3000 PSI |
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03 |
| O-Ring Material | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket |
| Connection 1 Size | 1.25" Tube O.D. (-20) |
| Connection 2 Type | Female Tube Socket |
| Connection 2 Size | 1.25" Tube O.D. (-20) |
| Connection 3 Type | Female Tube Socket |
| Connection 3 Size | 1" Tube O.D. (-20) |