


### DATA SHEET

H813-20-20-20-S

H813-20-20-20-S 07/14/2025 10:00 PM

### **Product Category**

**Part Description** 

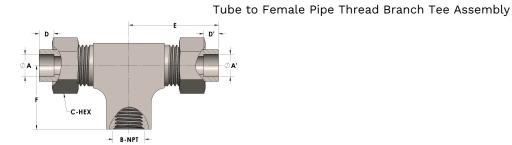

## DIMENSIONS

| Α     | 1.250         |
|-------|---------------|
| Α'    | 1.250         |
| B-NPT | 1.250" - 11.5 |
| C-HEX | 2             |
| D     | 0.560         |
| D'    | 0.560         |
| E     | 3.25          |
| F     | 2.19          |

# GENERAL

| Pressure Rating   | 3000 PSI                                           |
|-------------------|----------------------------------------------------|
| Assembly Material | Carbon Steel, ASTM A108                            |
| O-Ring Material   | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket                                 |
| Connection 1 Size | 1.25" Tube O.D. (-20)                              |
| Connection 2 Type | Female Tube Socket                                 |
| Connection 2 Size | 1.25" Tube O.D. (-20)                              |

#### https://www.cpvmfg.com 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the totabystem design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.