


H816-04-04-S

H816-04-04-04-S 07/01/2025 12:56 PM

## **Product Category**

**Part Description** 

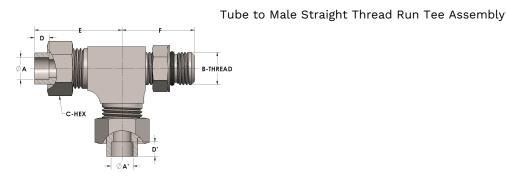

## DIMENSIONS

Α	0.250
Α'	0.250
B-THREAD	.438" - 20UINF
C-HEX	0.63
D	0.190
D'	0.190
E	1.19
F	1.19

## **GENERAL**

Pressure Rating	6000 PSI
Assembly Material	Carbon Steel, ASTM A108
O-Ring Material	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)
Connection 1 Type	Female Tube Socket
Connection 1 Size	1/40 Tube O.D. (-04)
Connection 3 Type	Female Tube Socket
Connection 3 Size	1/40 Tube O.D. (-04)

## https://www.cpvmfg.com 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the totabystem design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.