

American Engineering Trusted Wordwide

ØA


# DATA SHEET

H822-16-12-SS316L

H822-16-12-SS316L 07/01/2025 11:04 AM

#### **Product Category**

Part Description

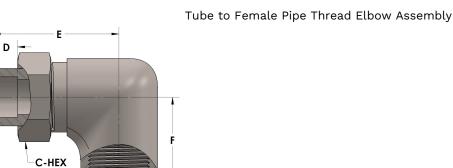

**B-NPT** 

## DIMENSIONS

Α	1.000
B-NPT	3/4" - 14
C-HEX	2
D	0.500
E	2.75
F	1.94

## **GENERAL**

Pressure Rating	4500 PSI
Assembly Material	316/L Stainless Steel, ASTM A276, UNS S31600/03
O-Ring Material	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)
Connection 1 Type	Female Tube Socket
Connection 1 Size	1" Tube O.D. (-16)
Connection 2 Type	Female Pipe Thread
Connection 2 Size	3/40 NPT (-12)

### https://www.cpvmfg.com 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the totabystem design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.