**Product Category** H823-06-10-S
**Part Description** Tube to Male Straight Thread Elbow Assembly

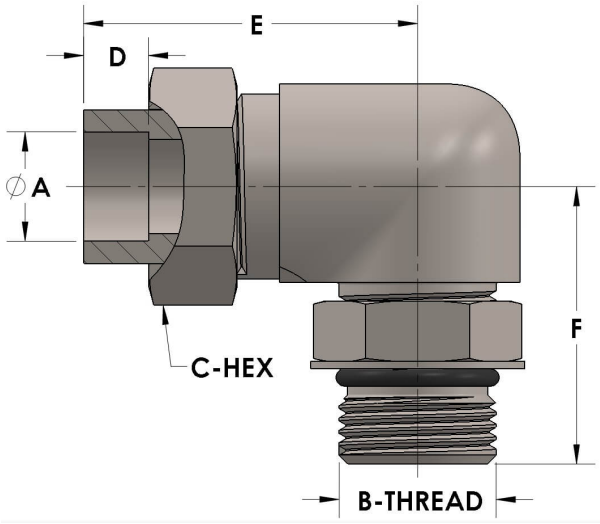


## DIMENSIONS

| | |
|---|---|
| **A** | 0.380 |
| **B-THREAD** | .875" - 14UNF |
| **C-HEX** | 1.13 |
| **D** | 0.250 |
| **E** | 1.94 |
| **F** | 1.69 |

## GENERAL

| | |
|---|---|
| **Pressure Rating** | 6000 PSI |
| **Assembly Material** | Carbon Steel, ASTM A108 |
| **O-Ring Material** | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| **Connection 1 Type** | Female Tube Socket |
| **Connection 1 Size** | 3/8" Tube O.D. (-06) |
| **Connection 2 Type** | Male Straight Thread |
| **Connection 2 Size** | .875" - 14UNF (-10) |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.