**Product Category** H823-12-12-S
**Part Description** Tube to Male Straight Thread Elbow Assembly

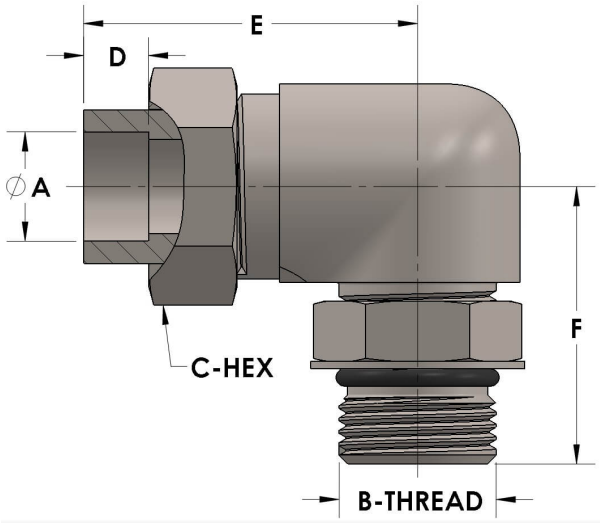


## DIMENSIONS

| | |
|---|---|
| **A** | 0.750 |
| **B-THREAD** | 1.063" - 12UN |
| **C-HEX** | 1.38 |
| **D** | 0.440 |
| **E** | 2.25 |
| **F** | 1.94 |

## GENERAL

| | |
|---|---|
| **Pressure Rating** | 4500 PSI |
| **Assembly Material** | Carbon Steel, ASTM A108 |
| **O-Ring Material** | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| **Connection 1 Type** | Female Tube Socket |
| **Connection 1 Size** | 3/4" Tube O.D. (-12) |
| **Connection 2 Type** | Male Straight Thread |
| **Connection 2 Size** | 1.063" - 12UN (-12) |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.