




**Product Category**  
**Part Description**

H849-32-SS316L  
Socketweld/braze Tube Union Assembly

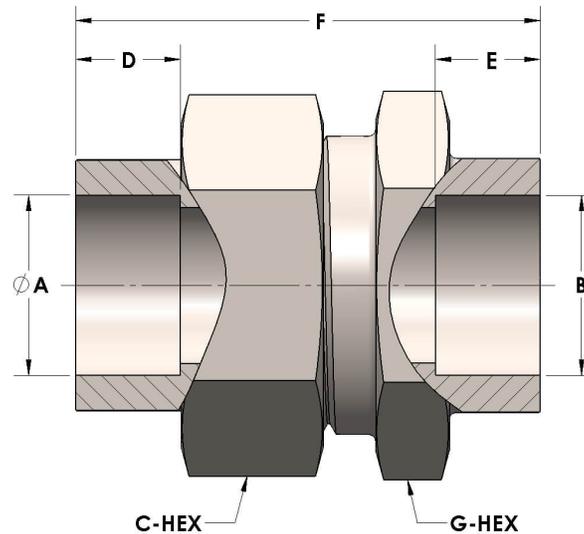

## DIMENSIONS

A	2.000
B	2.00
C-HEX	3.25
D	0.880
E	0.88
F	3.19
G-HEX	3

## GENERAL

Pressure Rating	4500 PSI
Assembly Material	316/L Stainless Steel, ASTM A276, UNS S31600/03
O-Ring Material	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)
Connection 1 Type	Female Tube Socket
Connection 1 Size	2.00" Tube O.D. (-32)
Connection 2 Type	Female Tube Socket
Connection 2 Size	2.00" Tube O.D. (-32)

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.